Authorized Distributor of Leadshine Technology


Leadshine


RoHS

标记(Mark)	处数(No.)	更改文件号File change No.)	更改内容(Content changed)	签名(Si	


给您 原厂+的选择 原厂+的服务 原厂-的成本

Dimension: (Unit: mm)

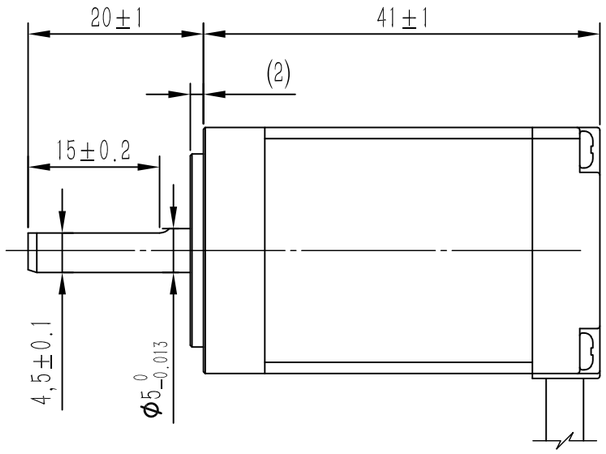

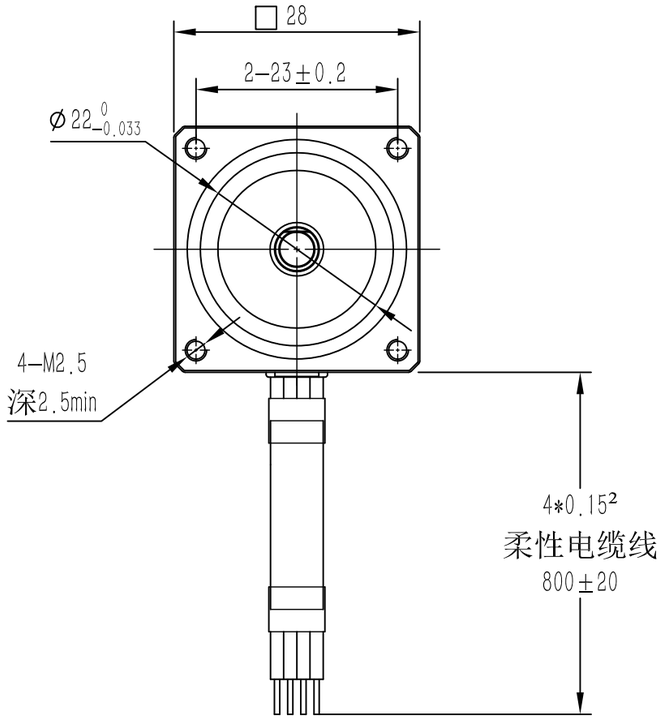

Motor Connetions:

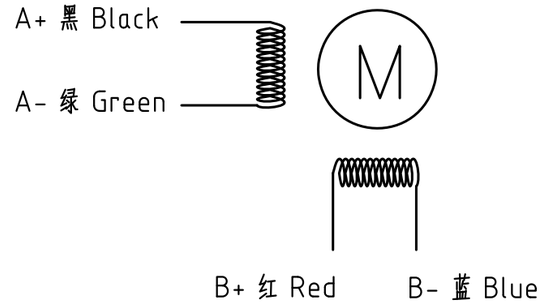

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MOhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	0.9 A
Voltage	1.71 V
DC Resistance/phase ±10%	1.9 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	0.1 N•M
Detent torque	0.018 N•M
Inertia	0.013 kg•cm²
Weight	0.15 kg

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设 计 Designed		标准化 Standardardized		材料(Material):	名称(Title) 步进电机
制 图 Drawn					型号(Model) 28CM010 MS20
校 对 Proofread		审 核 Checked		重量(Weight)/g:	图号(DWG No.) LS-28CM010 MS20
工 艺 Processed		批 准 Approved		阶段标记(Stage Mark)	料号(Part No.)
表单编号 Form No.	LS-QP-46-09A	版本/版次 Edition/Serial NO.	A/02	共1页 第1页 Page 1 of 1	比例(Scale) 1:1

雷赛智能官方代理：雷创智能科技
雷赛智能 Leadshine www.leadtronker.com