

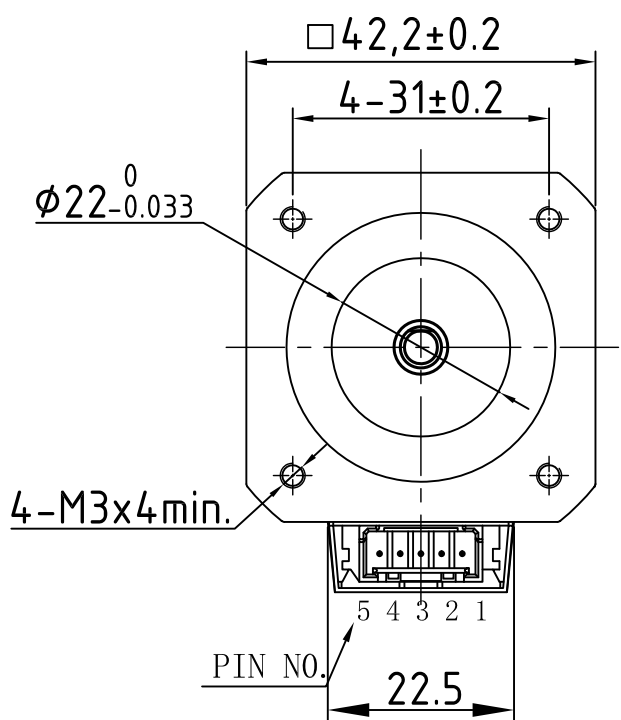
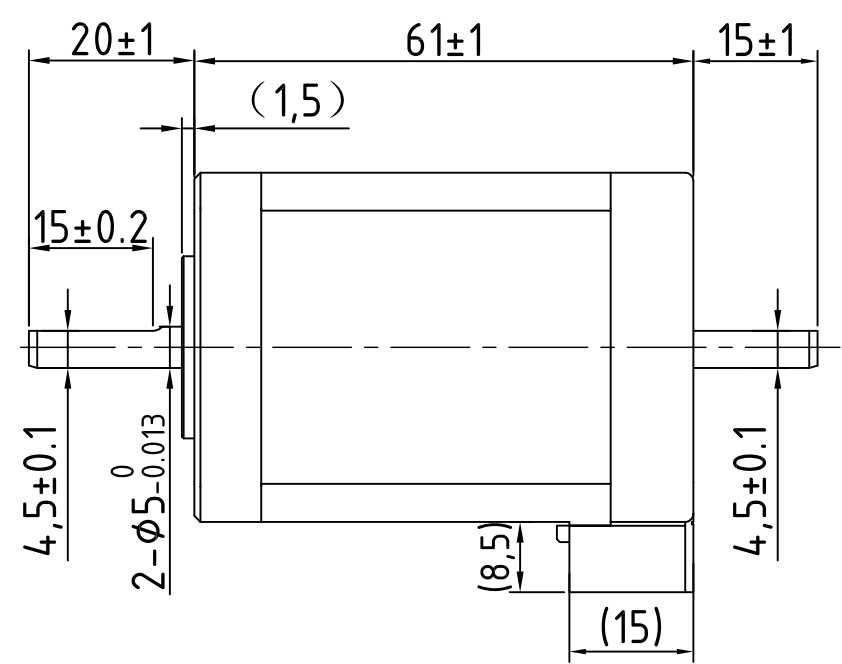


Dimension: (Unit: mm)

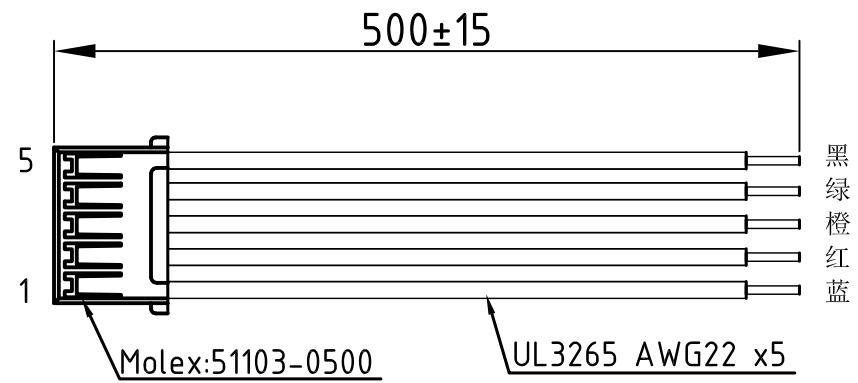

Motor Connctions

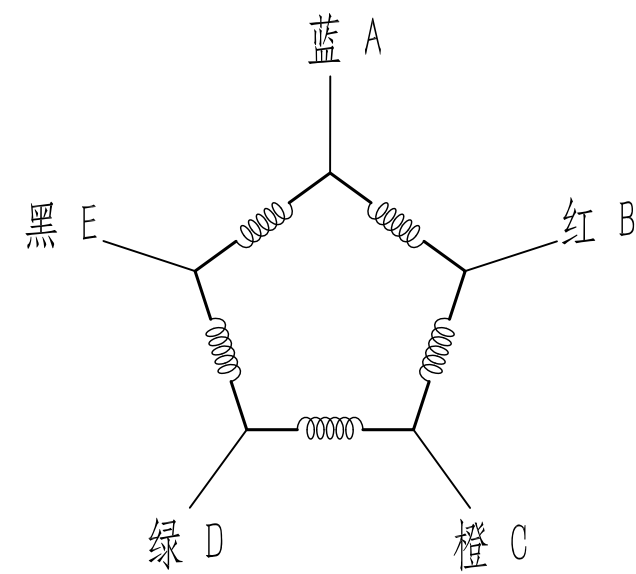

Common Rating

Step angle	0.72°
Position accuracy	0.72±0.036°
Dielectric strength	500VAC 1min
Insulation resistance	100M0hm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	1.8 A
Voltage	1.17 V
DC Resistance/phase ±10%	0.65 Ω
Inductance/phase ±20%	1.1 mH
Holding torque	0.5 N•M
Inertia	0.11 kg•cm ²
Weight	0.5 kg

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设计 Designed	标准化 Standardized	材料(Material):	名称(Title)	五相步进电机
制图 Drawn		重量(Weight)/g:	型号(Model)	425CM05-SZ
校对 Proofread	审核 Checked	阶段标记(Stage Mark)	图号(DWG No.)	LS-425CM05-SZ
工艺 Processed	批准 Approved		料号(Part No.)	
表单编号 Form No.	LS-QP-46-09A	版本/版次 Edition/Serial NO.	A/01	比例(Scale)
		共1页第1页 Page 1 of 1	1:1	