



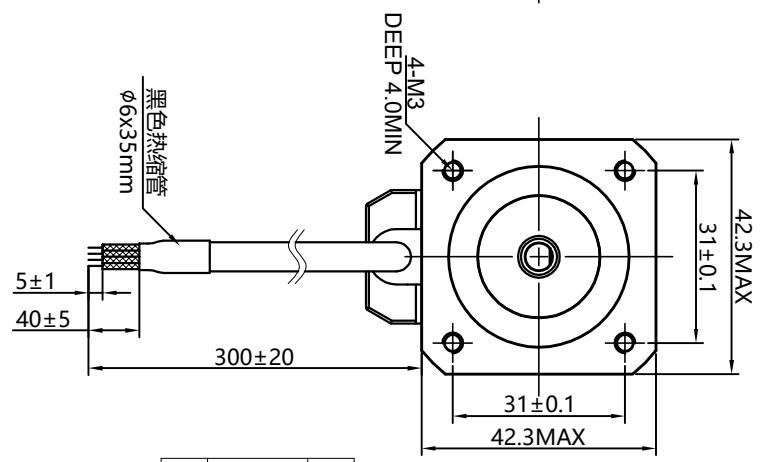


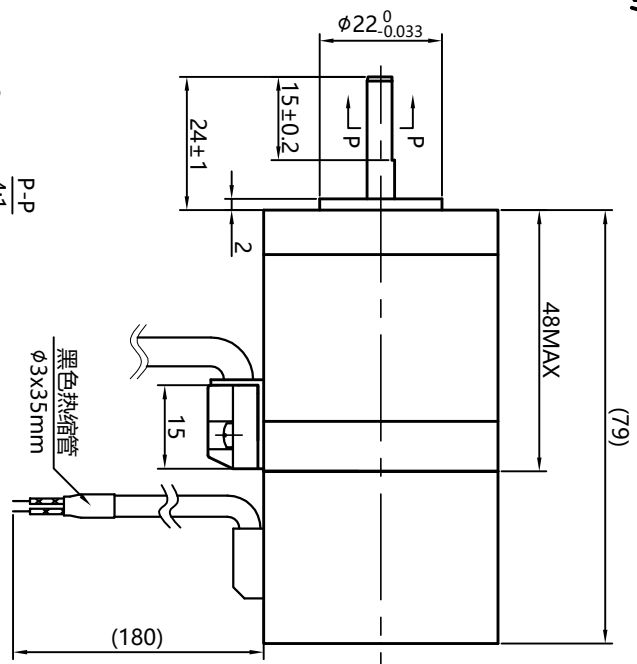

Dimension: (Unit: mm)

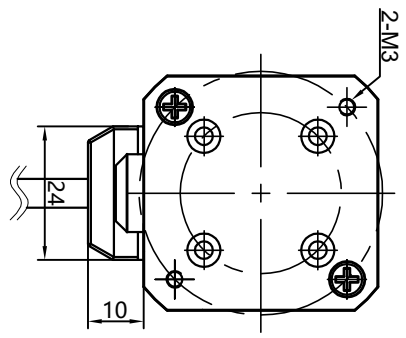

刹车参数	
接线图	红+ 黑-
电压	DC24V



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max 0.02mm(load 4.50g)
Axial play	Max 0.08mm(load 900g)

Specification:

Current/phase	2.0 A
Voltage	2.3 V
DC Resistance/phase ±10%	1.7Ω
Inductance/phase ±20%	3.2 mH
Holding torque	0.6 N·M
Inertia	0.072 kg·cm ²
Weight	0.56 kg

设计	杨陶	2021-08-30	标准化	材料(Material):	名称(Title):
制图	杨陶	2021-08-30	审核		开环步进电机
校对			批准		
工艺					
表单编号	LS-MT-01-07B	版本/版次	A/01	共1页第1页	Page of 1
Form No.		批准	黄建	2021-08-30	阶段标记 (Stage Mark)
		批准			料号(Part No.)
					型号(Model)
					图号(DWG No.)
					重量(Weight):
					42CM06-BZ MS20
					LS-42CM06-BZ MS20
					雷赛智能 Leadshine