





DIMENSIONS Unit:mm

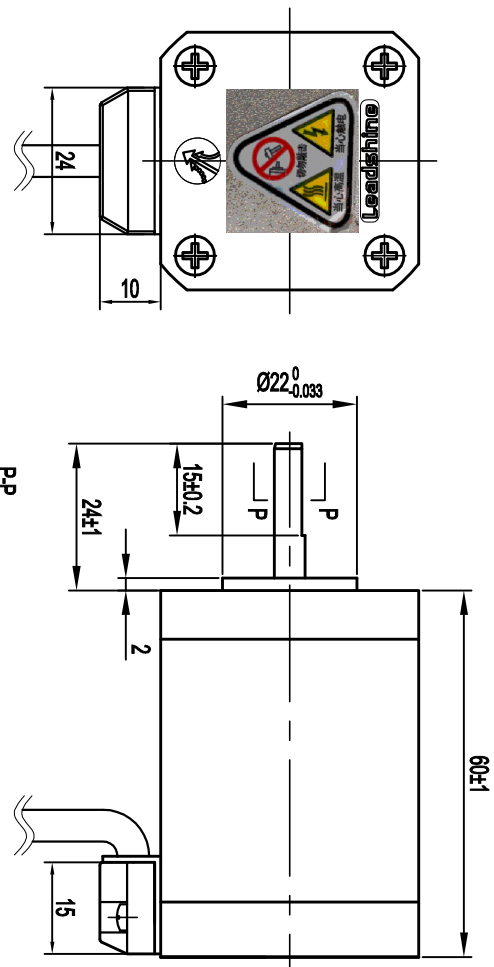

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	1.5 A
Voltage	4.5 V
DC Resistance/phase ±10%	3 Ω
Inductance/phase ±20%	6.9 mH
Holding torque	80 N·CM
Detent torque	0.08 N·M
Inertia	0.11 kg·cm ²
Weight	0.5 kg

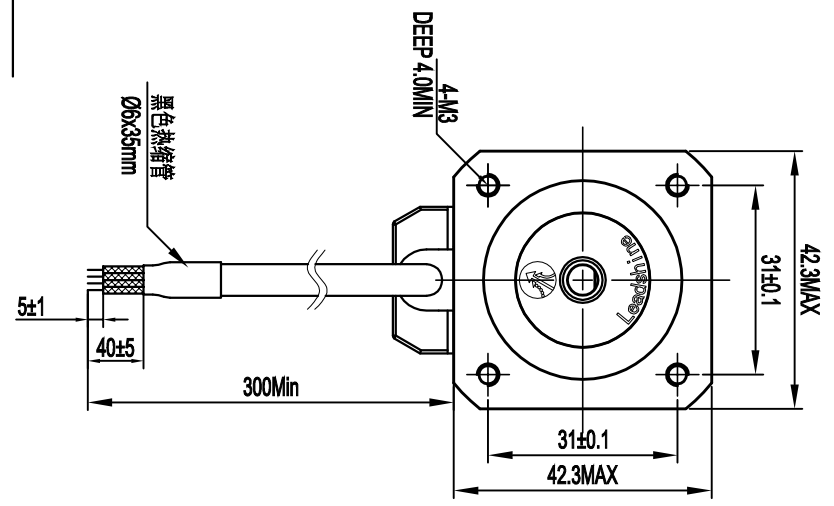

设计 日期 2020.04.16	材料 材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 日期 2020.04.16	第一角画法 First Angle projection	混合式步进电机
批准 日期 2020.04.16	版本/版次 A/01	42CM08-1A MS20
零件号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.
LS-MT-01-07A		LS-42CM08-1A MS20