



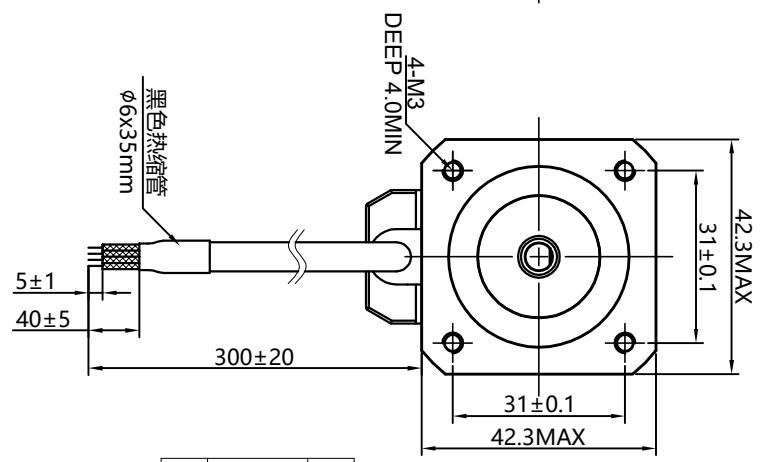


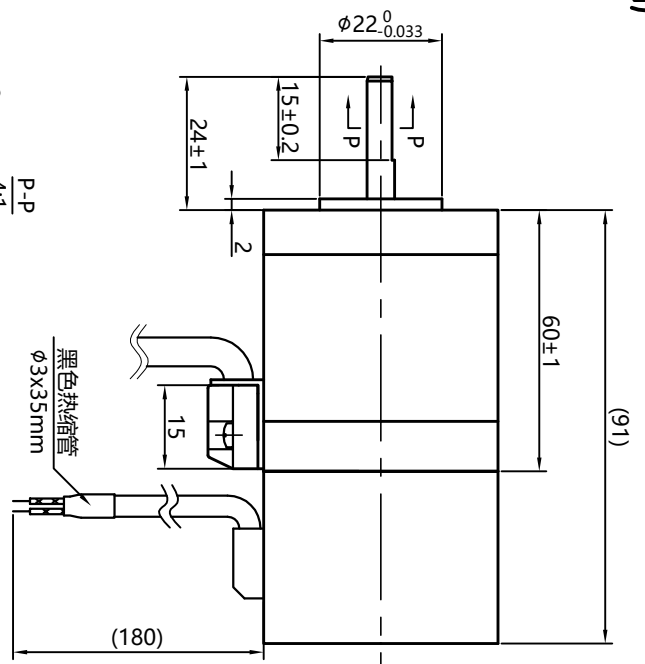

Dimension: (Unit: mm)

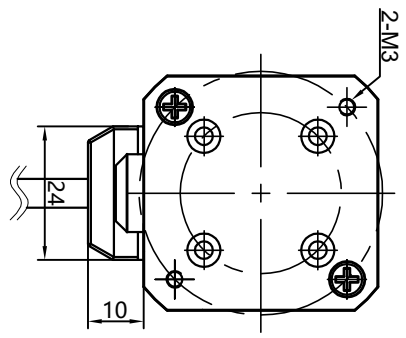

刹车参数	
接线图	红+ 黑-
电压	DC24V



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max 0.02mm(load 4.50g)
Axial play	Max 0.08mm(load 900g)

Specification:

Current/phase	2.0 A
Voltage	2.3 V
DC Resistance/phase ±10%	1.8Ω
Inductance/phase ±20%	4.0 mH
Holding torque	0.8 N·M
Inertia	0.11 kg·cm ²
Weight	0.7 kg

设计	杨陶	2021-08-30	标准化	名称(Title)	开环步进电机
制图	杨陶	2021-08-30	审核	型号(Model)	42CM08-BZ MS20
校对			批准	图号(DWG No.)	LS-42CM08-BZ MS20
工艺			批准	重量(Weight) /g:	
表单编号	LS-MT-01-07B	版本/版次	A/01	阶段标记(Stage Mark)	
Form No.		批准/Serial NO.		比例(Scale)	1:1
					雷赛智能 Leadshine