
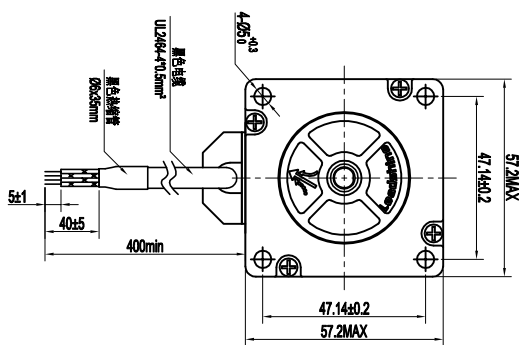



DIMENSIONS Unit:mm

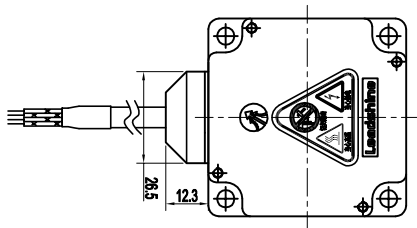


电机接线图

BLK 黑 A

GRN 绿 A

RED 红 B
BLU 蓝 B



Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)

Current/phase	3.0 A
Voltage	2.4 V
DC Resistance/phase ±10%	0.8 Ω
Inductance/phase ±20%	2.8 mH
Holding torque	1.3 N·M
Detent torque	0.04 N·M
Inertia	0.3 kg·cm ²
Weight	0.72 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	2021.04.28	第一套图 First Stage projection	混合式步进电机
批准 Approved	2021.04.28	版本/版次 A/01	57CM13-3A MS30
零件号 Part No.	LS-MT-01-07A	共 1 套 第 1 套 Sheet 1 of 1	图号 DWG. NO. LS-57CM13-3A MS30