


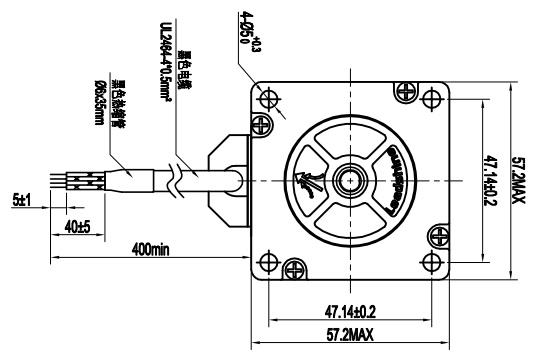


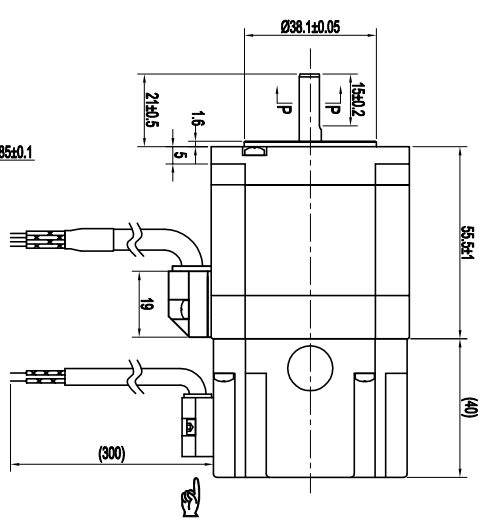

Dimension: (Unit: mm)

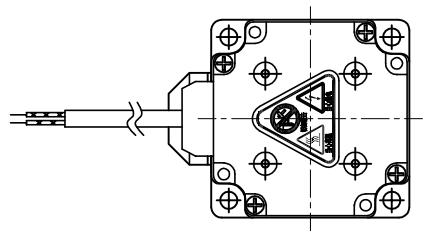

永磁式断电源半参数	
接线图	红+ 黑-
电压	DC24V
制动力	2Nm

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase ±10%	0.42 Ω
Inductance/phase ±20%	16 mH
Holding torque	13 N·M
Detent torque	0.040 N·M
Inertia	0.30 kg·cm ²
Weight	1.15 kg

设计 Designed	杨陶	2023-03-02	标准化 Standardization		名称(Title)	开环步进电机
制图 Drawn	杨陶	2023-03-02			型号(Model)	570M13-BZ MS30
校对 Proofread			审核 Checked		重量(Weight) g:	
工艺 Processed			批准 Approved	黄建建	阶段标记(Stage Mark)	料号(Part No.)
表单编号 Form No.	LS-MT-01-07B		版本/版次 Edition/Serial NO.	A/02	共1页第1页 Page of 1	比例(Scale)
						1:1

