
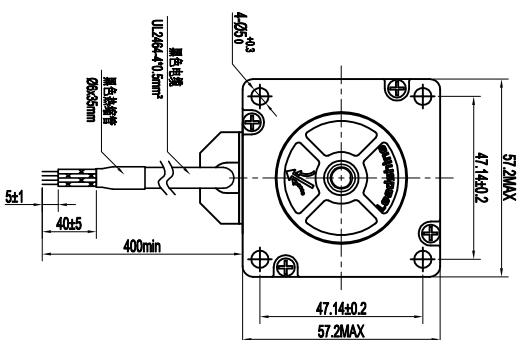

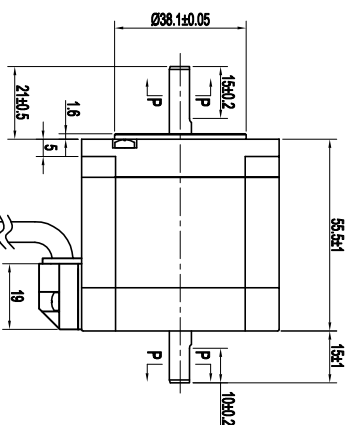


DIMENSIONS Unit=mm

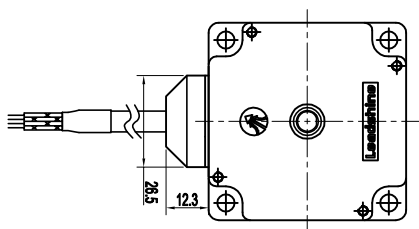

☐ 电机接线图

BLK 黑 A

GRN 零 A

RED 红 B
BLU 蓝 $\bar{B}$

RED BLU

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase $\pm 10\%$	0.42 Ω
Inductance/phase $\pm 20\%$	1.6 mH
Holding torque	1.3 N•M
Detent torque	0.04 N•M
Inertia	0.3 kg•cm ²
Weight	0.72 kg

设计		日期	材料		深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
Designed	日期	2021.04.28	Material			
审核	2021.04.28	第一角画法 First Angle projection	图例		混合式步进电机	
Checked	2021.04.28	图例	图例			
批准	2021.04.28	版本/版次 A/01	比例 Scale	图例	57CM13-SZ MS30	
Approved	2021.04.28	图例	图例			
零件编号 Part No.	LS-MT-01-07A	共 1 套 第 1 套	Sheet 1 of 1		图号 DWG NO. LS-57CM13-SZ MS30	

版本 Rev.	日期 date	变更文件号 ECR NO.	变更内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪林