
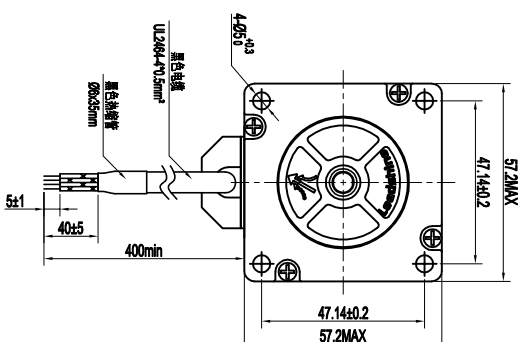



DIMENSIONS Unit=mm

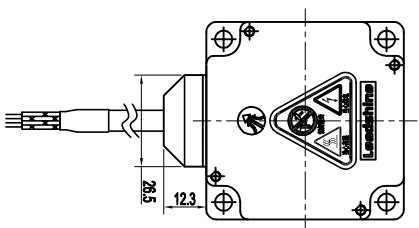

☐ 电机接线图

BLK 黑 A

GRN 零 A

RED 红 B
BLU 蓝 $\bar{B}$

RED BLU

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase $\pm 10\%$	0.42 Ω
Inductance/phase $\pm 20\%$	1.6 mH
Holding torque	1.3 N•M
Detent torque	0.04 N•M
Inertia	0.4 kg•cm ²
Weight	0.72 kg

深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.									
设计	5-2 陈	日期	2021.04.29		材料				
Designed		Date			Material				
审核	黄捷建		2021.04.29		第一角画法				
Checked					First Angle projection				
批准	黄捷建		2021.04.29		原图/原纹	比例 Scale	图例符号	图例名称	图例备注
Approved					A/02				
图号	LS-MT-01-07A		共 1 套 第 1 套		Sheet 1 of 1				
DWG. NO.	LS-57CM13 MS30								

版本 Rev.	日期 Date	变更文件号 ECR NO.	变更内容 Revisions	设计 By
V1.0	21.04.19		初版	王洪林
V2.0	21.04.29		修改更改为6.35	王洪林