

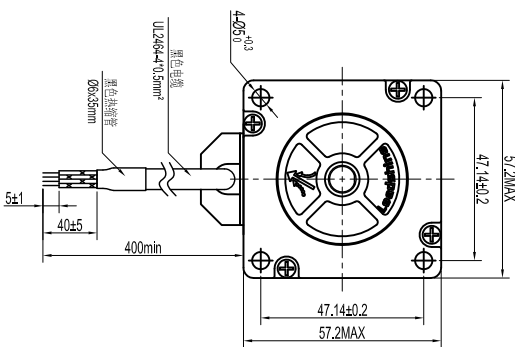
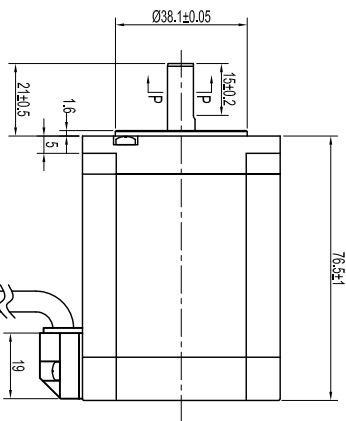
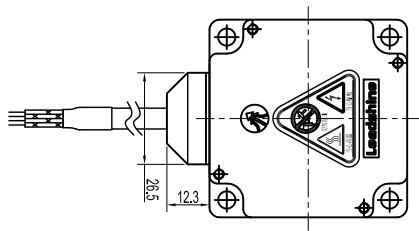


DIMENSIONS Unit:mm



□ 电机接线图



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Current/phase	4.0 A
Voltage	2.0 V
DC Resistance/phase ±10%	0.5 Ω
Inductance/phase ±20%	2 mH
Holding torque	2.3 N·M
Detent torque	0.068 N·M
Inertia	0.48 kg·cm ²
Weight	1.1 kg

设计 2021.04.28	日期 2021.04.28	材料
审核 2021.04.28	第一角画法 First Angle projection	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
批准 2021.04.28	版本/版次 A/01	混合式步进电机
零件号 Part No.	图号 DWG. NO.	
LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	57CM23-4A MS30