



DIMENSIONS Unit:mm

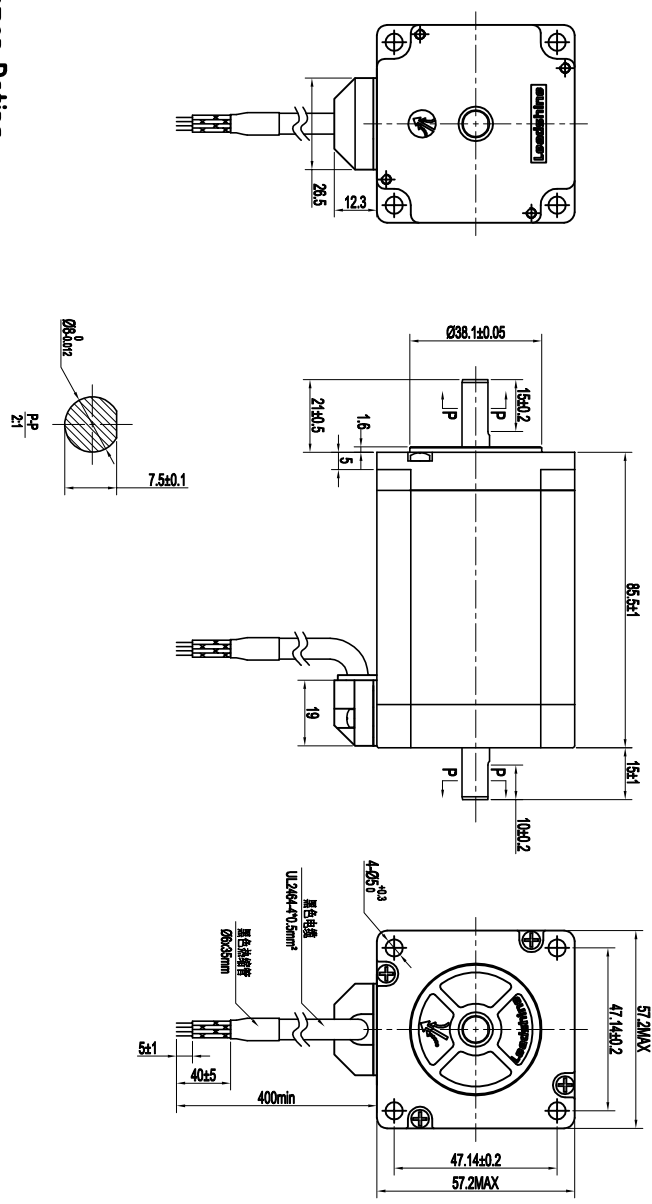

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Current/phase	5.0 A
Voltage	2.2 V
DC Resistance/phase ±10%	0.44 Ω
Inductance/phase ±20%	2 mH
Holding torque	2.6 N·M
Detent torque	0.068 N·M
Inertia	0.48 kg·cm ²
Weight	1.2 kg

设计	日期	材料	深圳市雷赛智能控制股份有限公司
2021.04.28	2021.04.28	SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
审核	2021.04.28	第一角画法	混合式步进电机
批准	2021.04.28	版本/版次	57CM26-SZ MS30
2021.04.28	2021.04.28	比例 Scale	
2021.04.28	2021.04.28	阶段标志 Stage Mark	
2021.04.28	2021.04.28	共 1 套 第 1 套	Sheet 1 of 1
2021.04.28	2021.04.28	零件号 Part No.	LS-MT-01-07A
2021.04.28	2021.04.28	图号 DWG. NO.	LS-57CM26-SZ MS30