



Dimension: (Unit: mm)

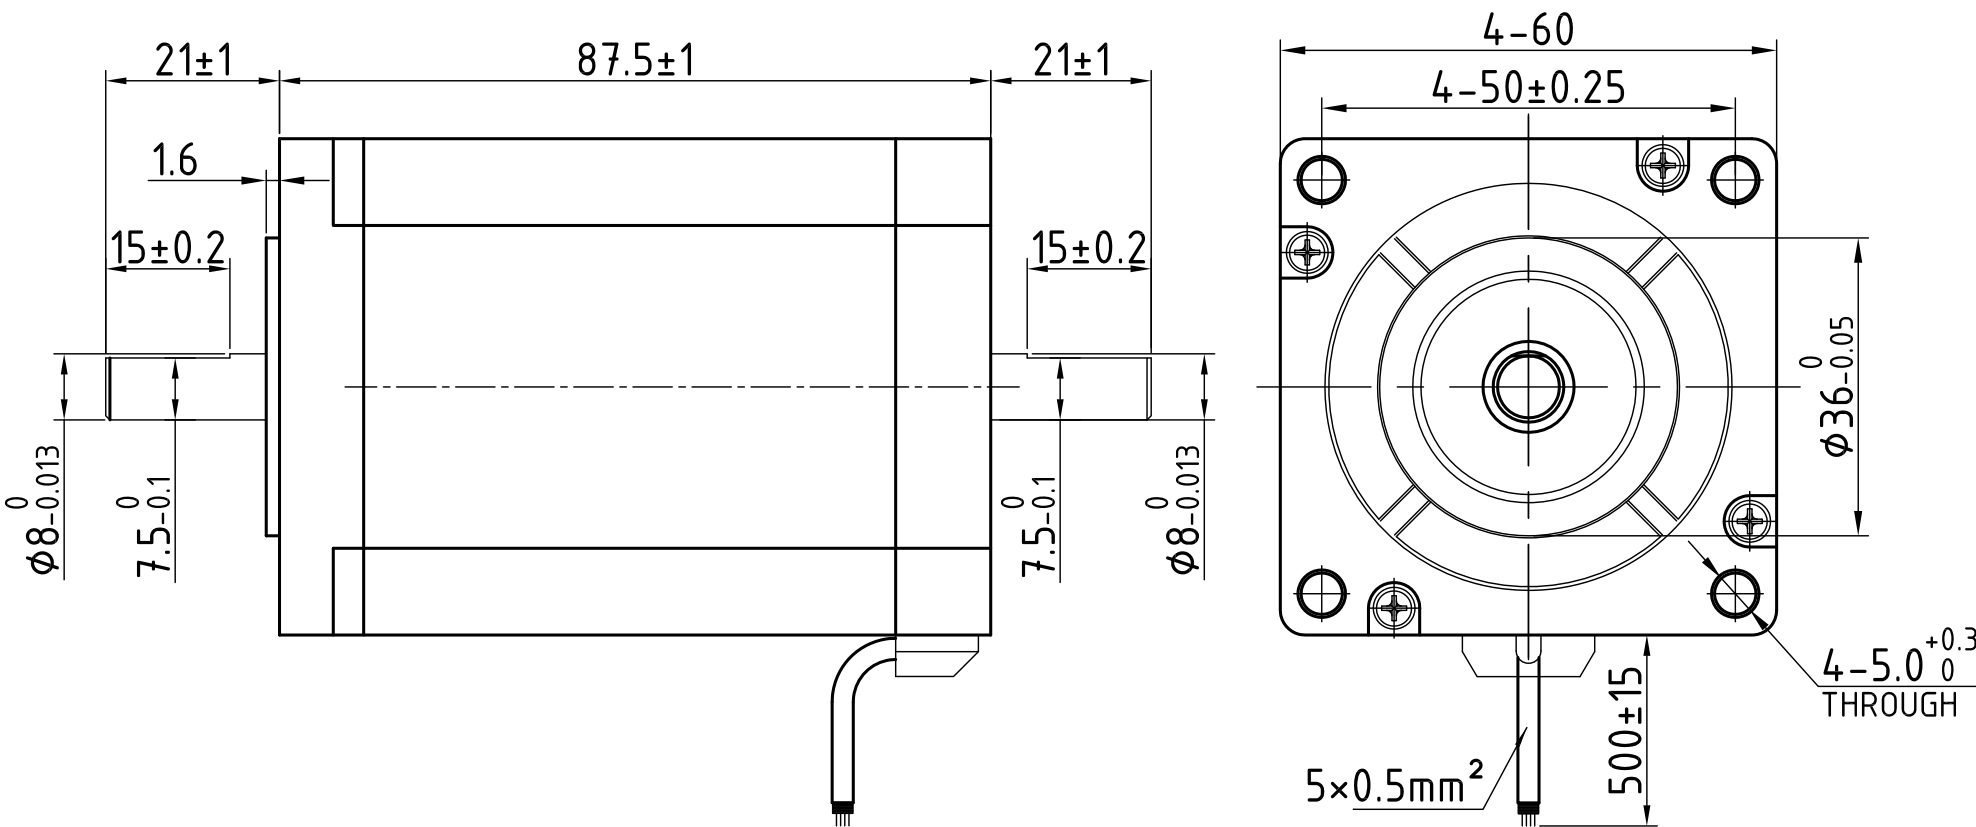

Motor Connctions

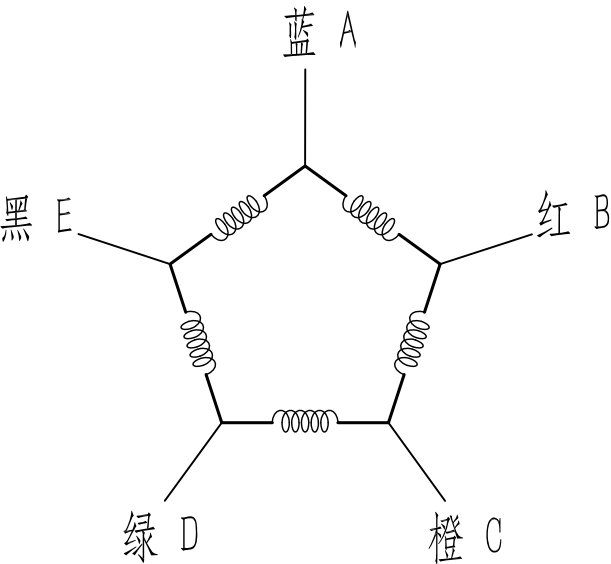

Common Rating

Step angle	0.72°
Position accuracy	$0.72 \pm 0.036^\circ$
Dielectric strength	500VAC 1min
Insulation resistance	100MOhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	2.4 A
Voltage	1.66 V
DC Resistance/phase $\pm 10\%$	0.69 Ω
Inductance/phase $\pm 20\%$	3 mH
Holding torque	2.1 N·M
Inertia	0.54 kg·cm ²
Weight	1.3 kg

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设计 Designed	标准化 Standardized	材料(Material):	名称(Title)	五相步进电机
制图 Drawn			型号(Model)	605CM21-SZ
校对 Proofread	审核 Checked	重量(Weight)/g:	图号(DWG No.)	LS-605CM21-SZ
工艺 Processed	批准 Approved	阶段标记(Stage Mark)	料号(Part No.)	
表单编号 Form No.	LS-QP-46-09A	版本/版次 Edition/Serial NO.	比例(Scale)	1:1
			共1页第1页 Page 1 of 1	