
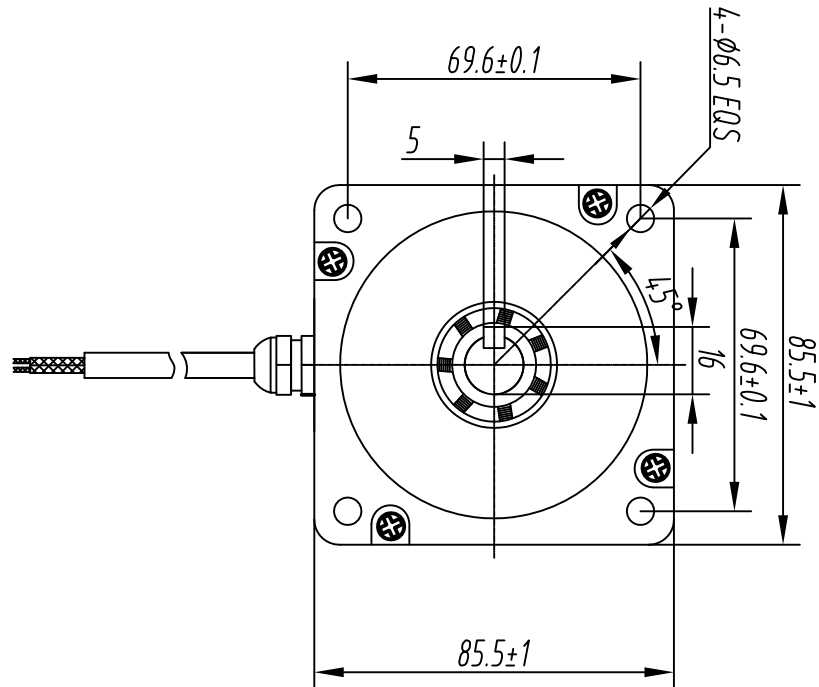
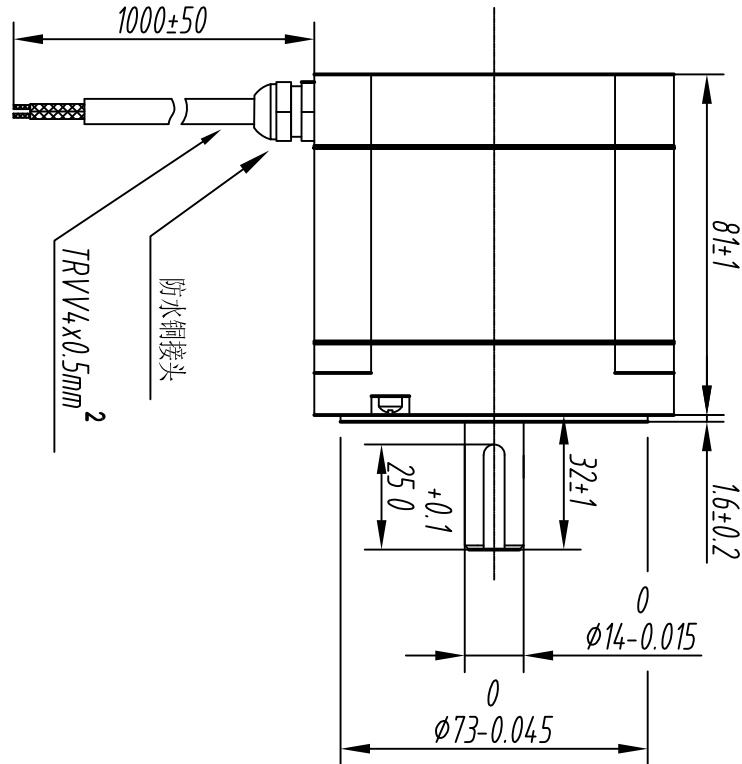


Dimension: (Unit: mm)

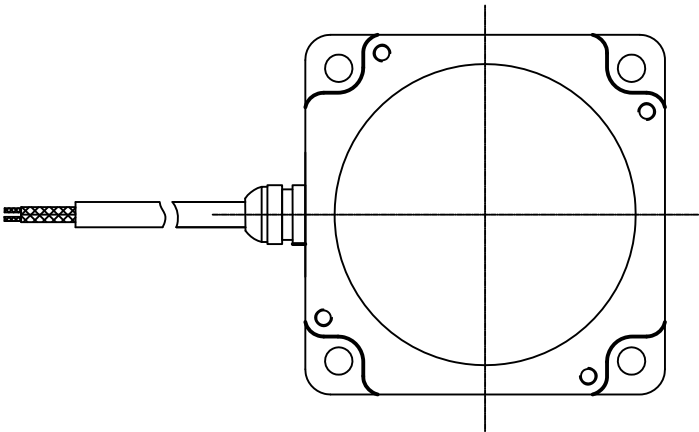


Common Rating

Step angle	0.25°
Position accuracy	1.8±5%
Dielectric strength	500VAC 1min
Insulation resistance	100MΩh(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6 A
Voltage	2.7V
DC Resistance/phase	±10% 0.45 Ω
Inductance/phase	±20% 3.5 mH
Holding torque	4.5 N•M
Inertia	1.95 kg•cm²
Weight	2.5 kg

Motor Connetions

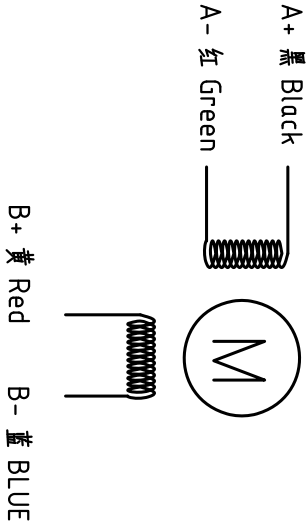

技术要求:

- 1.未注形位公差按GB/T 1184-K;
- 2.未注尺寸公差按GB/T 1804-m (除非另外指定)
- 3.定子表面喷塑处理; 端盖电泳处理
- 4.前后端盖孔位涂覆防水胶
- 5.符合IP65防护标准

标记(Mark)	次数(No.)	更改文件号(File change No.)	更改内容(Content changed)	签名(Signature)	日期(Date)

设计 Designed		标准化 Standardized		材料(Material):	名称(Title)	步进电机
制图 Drawn					型号(Model)	86CM45-FS MS20
校对 Proofread		审核 Checked		重量(Weight)/g:	图号(DWG No.)	LS-86CM45-FS MS20
工艺 Processed		批准 Approved		阶段标记(Stage Mark)	料号(Part No.)	
表单编号 Form No.	LS-QP-46-09A	版本/版次 Edition/Serial NO.	A/01	共1页第1页 Page 1 of 1	比例(Scale)	1:1
雷赛智能 Leadshine						