
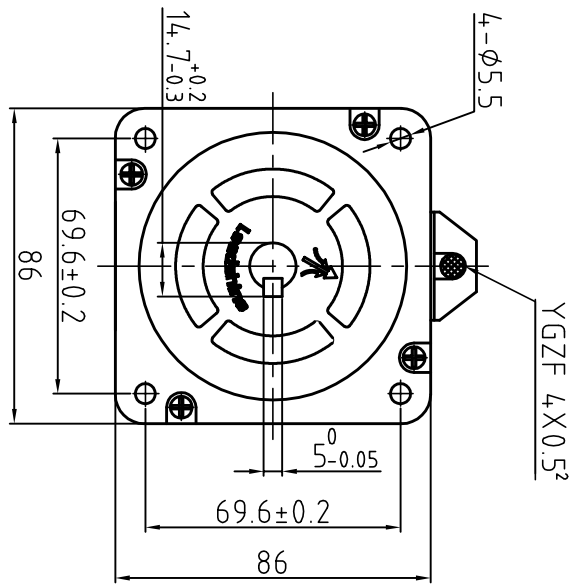


Dimension: (Unit: mm)

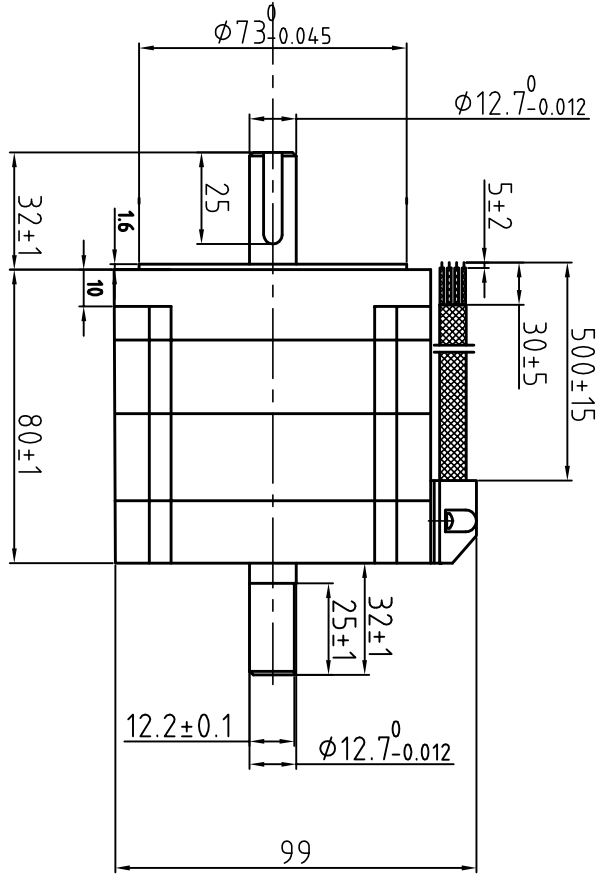


Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.6V
DC Resistance/phase	0.43 Ω
Inductance/phase	2.95 mH
Holding torque	4.6N•M
Inertia	14. kg•cm²
Weight	2.4 kg

Motor Connections

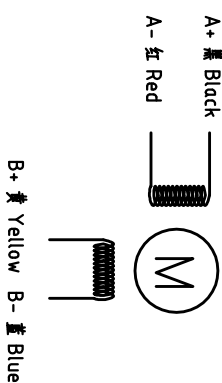

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.11.8		原出轴	王洪林

设计 Designed	王洪林	日期 Date	17.11.08	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建		17.11.08	第一角画法 First Angle projection	混合式步进马达
批准 Approved	黄捷建		17.11.08	版本/版次 Scale	86CM4.5-SZ
图号 Part No.	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号 DWG. NO.
					LS-86CM4.5-SZ