

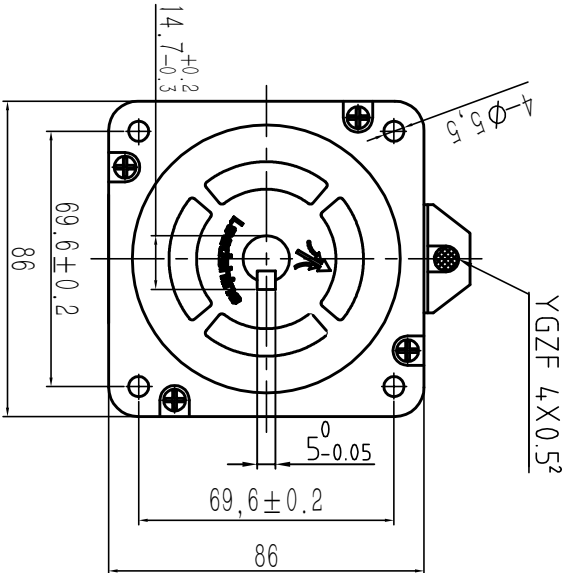


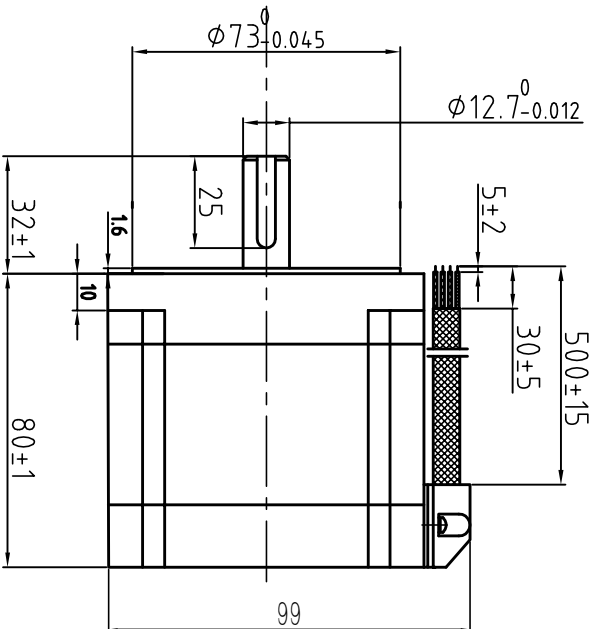

Dimension: (Unit: mm)

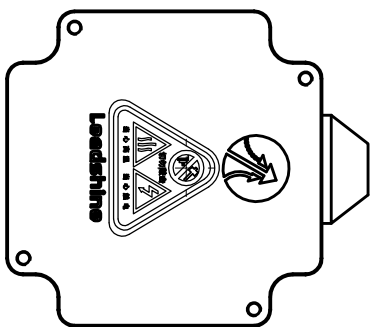


Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max 0.02mm(Load 450g)
Axial play	Max 0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.6V
DC Resistance/phase	0.43 Ω
Inductance/phase	2.95 mH
Holding torque	4.6N·M
Inertia	1.4 kg·cm²
Weight	2.4 kg

Motor Connections

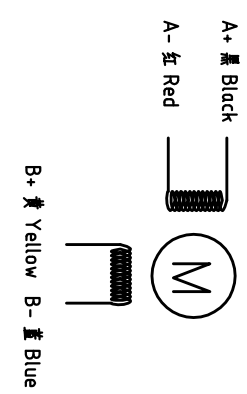

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设计 Designed	杨陶	2022-05-05	标准化 Standardization		材料(Material):	名称(Name)	开环步进电机
制图 Drawn	杨陶	2022-05-05				型号(Model)	86CM45 MS20
校对 Proofread			审核 Checked	王洪松	2022-05-05	重量(Weight):	
工艺 Processed			批准 Approved	黄桂建	2022-05-05	阶段标记(Stage Mark)	LS-86CM45 MS20
表单编号 Form No.	LS-MT-01-07B		版本/版次 Edition/Serial NO.	A/01	共1页第1页 Page of 1	比例(Scale)	1:1
							雷赛智能 Leadshine

标记(Mark)	次数(No.)	更改文件编号(Rev. change No.)	更改内容(Content changed)	签名(Signature)	日期(Date)